
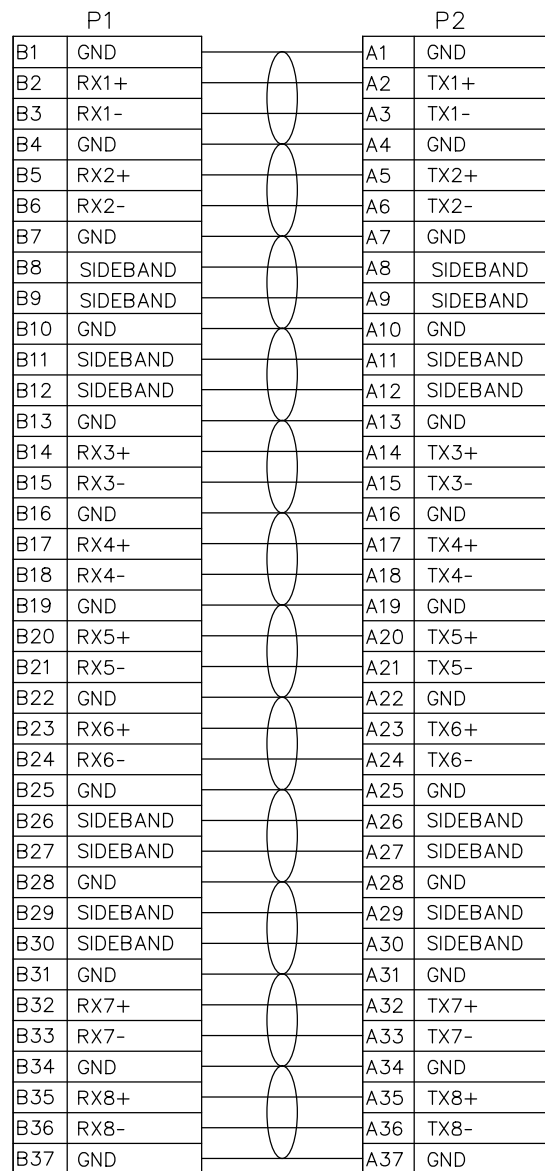


10	防尘帽	8654 8i 防斜插 防尘帽	2	PCS
9	拉环	拉环	2	PCS
8	弹片	不锈钢弹片	2	PCS
7	编织网	PET,单股, OD10mm, 黑色	A/R	M
6	醋酸胶布	醋酸胶布,W=7±3mm, 黑色	A/R	M
5	醋酸胶布	醋酸胶布,W=25±5mm, 黑色	A/R	M
4	成型料	黑色PBT-RG30+30%GF	A/R	g
3	成型料	PE料透明	A/R	g
2	PCB	SLIMSAS 8i PCB, PIN: Au 15U" 88±8 ohm	2	PCS
1	线材	SAS CABLE : 32AWGx2C+2D+AL.Mylay+Amylay印字,85±5 ohm	A/R	M
NO.	名称	描述	Q'TY	UNITS

电气特性:
 1.100%开路、短路、断路测试。
 2.绝缘阻抗: 10M Ohm Min
 3.导通阻抗: 2 Ohm MAX
 4.耐压: DC 300V,0.01/Sec

A	INITIAL RELEASE		25/09/30	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES MM			DIKWAN 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	WSY		SCALE	NONE
CHECK BY			UNIT	MM
CUSTOMER P/N:			SHEET	1/2
			DATE	25/09/30
			DWG NO:	
			TITLE: SLIMSAS 8654 8i-8i 防斜插-防斜插	
			P/N: 1.AMSAFFF10002	

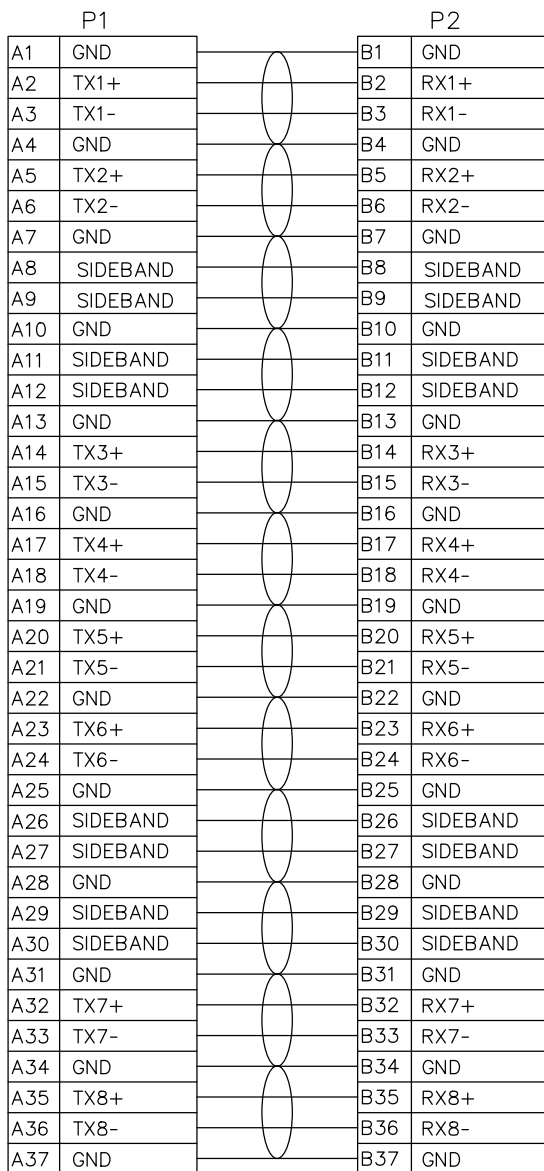

A	INITIAL RELEASE		25/09/30	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			DIKWAN ® 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.	
INCHES MM				
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
DRAWN BY	WSY		UNIT	MM
			SHEET	2/2
CHECK BY			DATE	25/09/30
			DWG NO:	
CUSTOMER P/N:			P/N:1.AMSA AFF10002	