

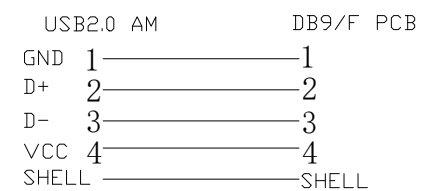


1	DCD
2	TXD
3	RXD
4	DSR
5	GND
6	DTR
7	CTS
8	RTS
9	RI



电气特性:
 1.100%开路、短路、断路测试。
 2.绝缘阻抗: 10M Ωhm Min
 3.导通阻抗: 2 Ωhm MAX
 4.耐压: DC 300V,0.01/Sec

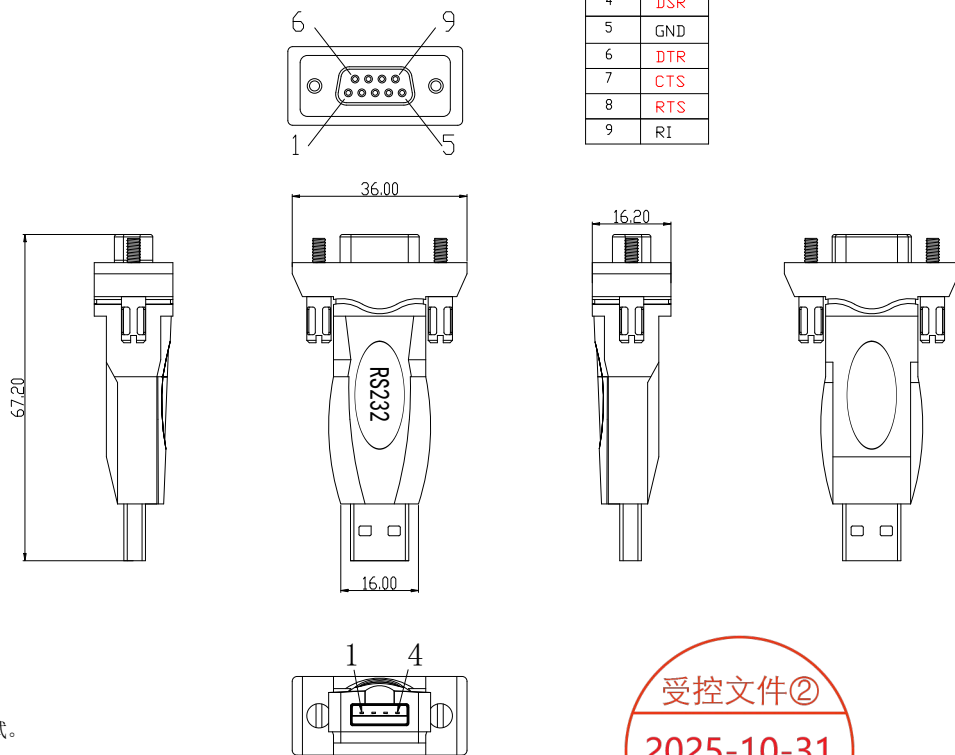

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
6	连接器	DB9/母,G/F	1	pcs
5	螺杆	SREW,φ2.3*20mm	2	pcs
4	连接器	USB A/M,G/F	1	pcs
3	胶料	LDPE	A/R	G
2	胶料	45P PVC,黑色	A/R	G
1	PCBA	PCBA,FR4,FT232+ZT213,W13.5*L35*T1.2mm	1	PCS

A	INITIAL RELEASE		25/10/31		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE			DIKWAN ® 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.		
INCHES MM					
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05	SCALE	NONE	
DRAWN BY	WSY	UNIT	MM	REV	A
		SHEET	1/1		
CHECK BY		DATE	25/10/31	DWG NO:	
CUSTOMER P/N:			TITLE: DB9/F-USB 母头 B		
P/N: ADB26CV30001					