


8654 4I防尘帽 ⑮

- 电气特性:
- 1.100%开路、短路、断路测试。
  - 2.绝缘阻抗: 10M Ωhm Min
  - 3.导通阻抗: 2 Ωhm MAX
  - 4.耐压: DC 300V,0.01/Sec

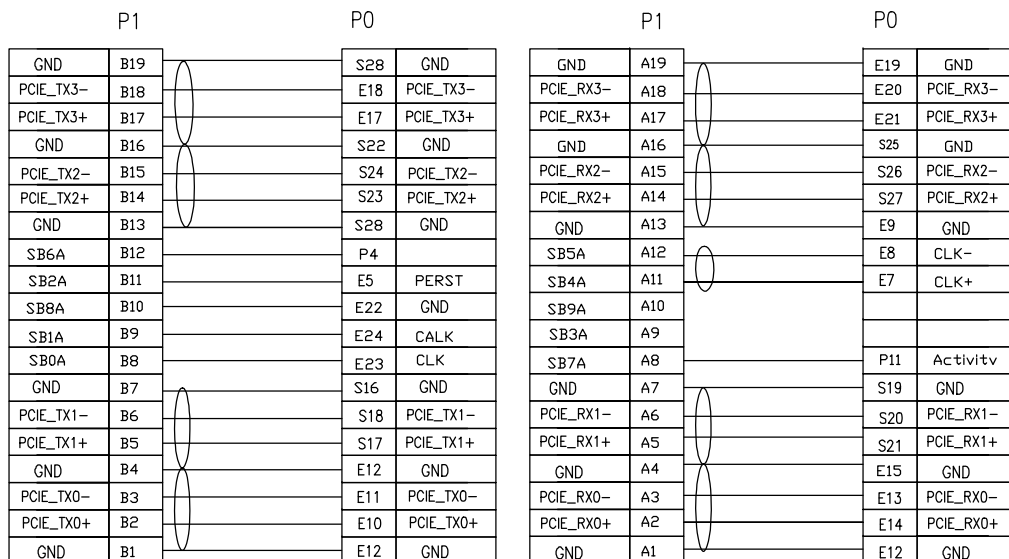

	P0	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9	P12	P13	P14	P15
	P2	P1P2P3		----			P4P5P6		P7P8P9			P10P11P12		P13P14P15	
SYMBOL		3.3V		----			GND		5V			GND		12V	
WIRE AWG		24AWG		----			20AWG		20AWG			24AWG		20AWG	

⑮	防尘帽	8654 4I防尘帽	1	PCS
⑭	线材	24AWG 电子线	A/R	M
⑬	线材	20AWG 电子线	A/R	M
⑫	胶料	LDPE,NATURAL	A/R	G
⑪	胶料	45P PVC 黑色	A/R	G
⑩	胶料	PBT+30GF% 黑色	A/R	G
⑨	网管	PET 黑色 DD: 10mm	A/R	M
⑧	连接器	15PIN SATA/M G/F 黑色	1	PCS
⑦	醋酸胶布	W=25±5mm 黑色	A/R	M
⑥	弹片	不锈钢弹片	1	PCS
⑤	PCB	SLIMSAS 8654 4I PCB, PIN: Au 15U", 88±8 ohm	1	PCS
④	连接器	SAS 68P/F 焊接式 180° 黑色	1	PCS
③	PCB	MINISAS 8639 PCB, PIN: Au 1U", 88±8 ohm	1	PCS
②	线材	30AWG 电子线	A/R	M
①	线材	(32AWG*2C+2d)*Al+MYLAR,DD:0.65*1.52MM,85±5 ohm	A/R	M
NO.	NAME	MATERIAL DESCRIPTION	Q'TY	UNIT

A	INITIAL RELEASE		25/08/04
REV	DESCRIPTION OF CHANGE		DATE

TOLERANCE			INCHES		MM		DONGGUAN AIQUN INDUSTRIAL CO.,LTD			
.X	.015	.030	东莞市嵩群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD							
.XX	.010	.010								
.XXX	.005	.005								
DRAWN BY	TONY CHAN		SCALE	NONE	REV		A			
CHECK BY			UNIT	MM	SHEET		1/1			
CUSTOMER P/N:			DATE	25/08/04	CUSTOMER:		DWG No.:AQ1617			
			TITLE:SLIMSAS 8654 4I-8639							
			P/N:1.AMS970E10001							