



MCID 8X 防尘帽⑩



电气特性:
 1.100%开路、短路、断路测试。
 2.绝缘阻抗: 10M Ωhm Min
 3.导通阻抗: 2 Ωhm MAX
 4.耐压: DC 300V,0.01/Sec

NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT
10	防尘帽	MCID 8X 防尘帽	2	PCS
9	拉环	蓝色拉环	2	PCS
8	醋酸胶布	W=7±3mm, 黑色	A/R	mm
7	弹片	不锈钢弹片	2	PCS
6	网管	PET 黑色 OD: 10mm	A/R	mm
5	醋酸胶布	W=25±5mm, 黑色	A/R	mm
4	胶料	PA, 黑色	A/R	g
3	外壳	MCID 8X PA66+20%GF, 黑色外壳	2	PCS
2	PCBA	MCID 8X PCB, PIN: Au 15U", 88±8 ohm	2	PCS
1	线材	<30AWG*2C+2D>AL+MYLAR, OD: 1.0*1.85MM, 85±5 ohm	A/R	mm

A	INITIAL RELEASE		25/09/11	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			DIKWAN ® 东莞市嵩群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO., LTD.	
INCHES				
MM				
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	1/2
DRAWN BY	Wu Siyuan		DATE	25/09/11
CHECK BY			DWG NO:	
CUSTOMER P/N:			P/N: 1.AMSEE0010001	

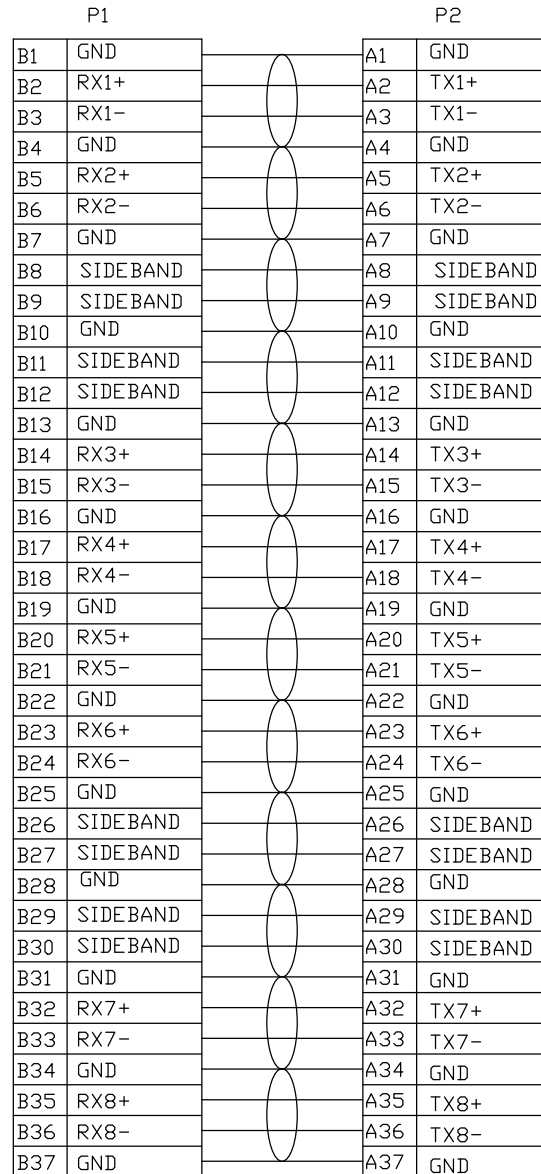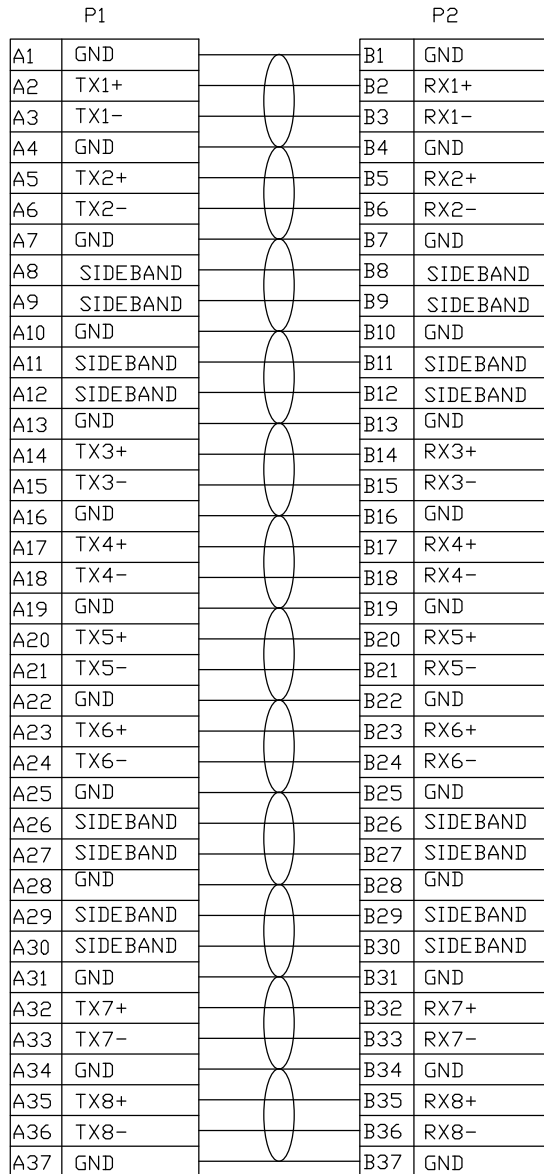

A	INITIAL RELEASE		25/09/11	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			OIKWAN ® 东莞市嵩群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO., LTD.	
INCHES MM				
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
DRAWN BY	Wu Siyuan		UNIT	MM
			SHEET	2/2
CHECK BY			DATE	25/09/11
			DWG NO:	
CUSTOMER P/N:			P/N: 1.AMSEE0010001	