



电气特性:
 1.100%开路、短路、断路测试。
 2.绝缘阻抗: 10M Ωhm Min
 3.导通阻抗: 2 Ωhm MAX
 4.耐压: DC 300V,0.01/Sec

18	拉环	拉环	1	PCS
17	标签	P1/P2 标签	2	PCS
16	防尘盖	MCID 8X 防尘盖	1	PCS
15	线材	24AWG 电子线	A/R	M
14	线材	20AWG 电子线	A/R	M
13	胶料	LDPE,NATURAL	A/R	KG
12	胶料	45P PVC 黑色	A/R	KG
11	胶料	低压料PA	A/R	KG
10	网管	PET BALCK OD: 14mm 黑色	A/R	M
9	连接器	15PIN SATA/M G/F 黑色	2	PCS
8	醋酸胶布	W=25±5mm 黑色	A/R	M
7	弹片	不锈钢弹片	1	PCS
6	外壳	MCID 8X PA66+20%GF, 黑色外壳	1	PCS
5	PCB	MCID 8X PCB, PIN: Au 15U", 88±8 ohm	1	PCS
4	连接器	SAS 68P/F 黑色	2	PCS
3	PCB	MINISAS 8639 PCB, PIN: Au 1U", 88±8 ohm	2	PCS
2	线材	30AWG 电子线	A/R	M
1	线材	30AWGx2C+2D+AL.my lay+amy lay 印字, OD: 0.8x1.76, 85±5 ohm	A/R	M
NO.	NAME	MATERIAL DESCRIPTION	Q'TY	UNIT



A	INITIAL RELEASE		25/09/26	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES MM			DIKWAN ® 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.	
.X	.015	.030		
.XX	.010	.010		
.XXX	.005	.005	SCALE	NONE
DRAWN BY	Wu Siyuan		UNIT	MM
CHECK BY			SHEET	1/2
CUSTOMER P/N:	P/N:1.AMSE70010007		DATE	25/09/26
			DWG No.:	AQ1617
			TITLE:	MCID 8X TO 2*8639+15P

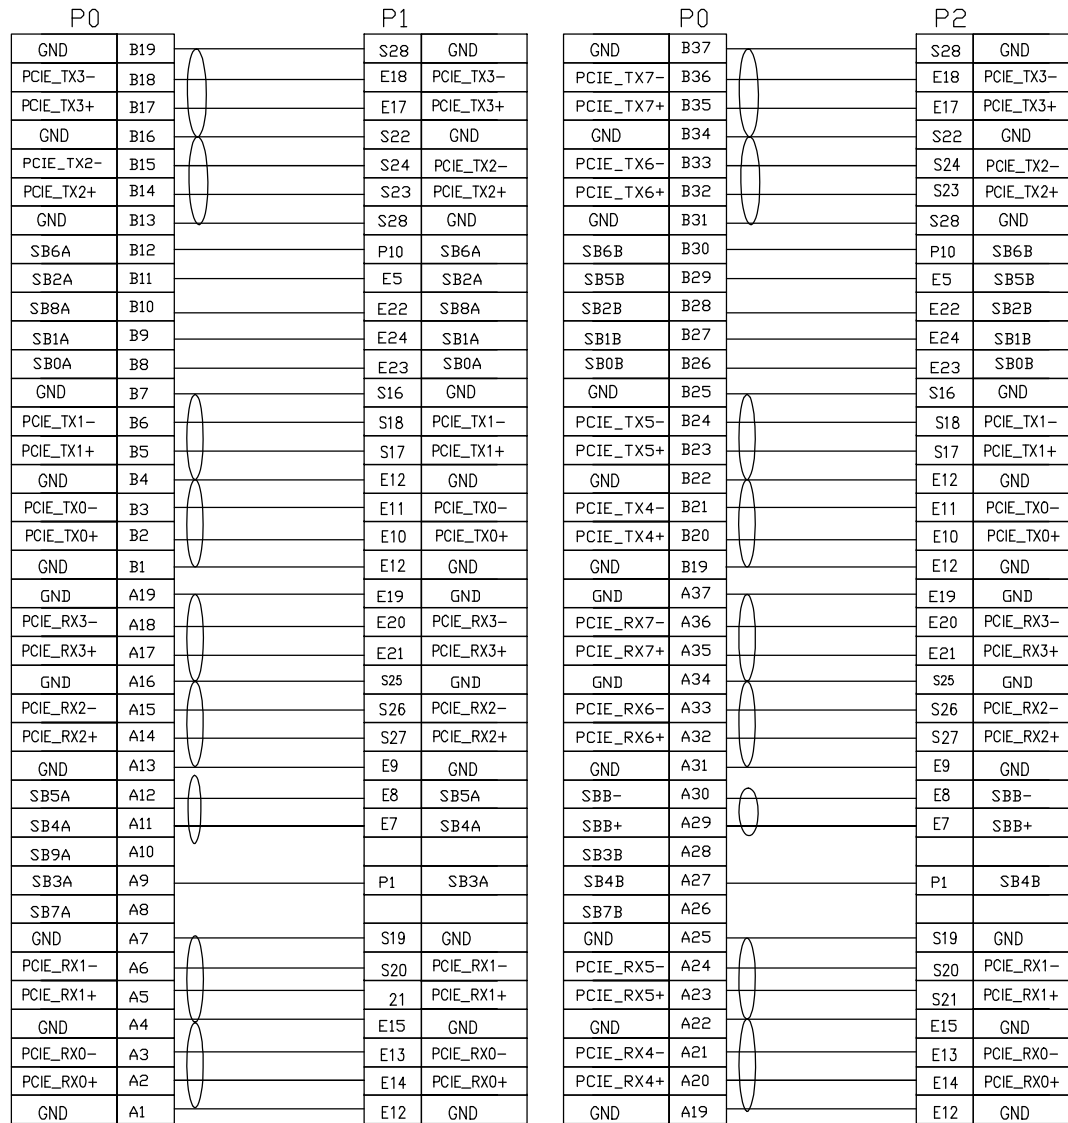

P1/P2	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9	P12	P13	P14	P15
P3/P4	P1P2P3	----			P4P5P6	P7P8P9		P10P11P12		P13P14P15				
SYMBOL	3.3V	----			GND	5V		GND		12V				
WIRE AWG	24AWG	----			20AWG	20AWG		24AWG		20AWG				

A	INITIAL RELEASE		25/09/26	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES MM			DIKWAN ® 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.	
.X	.015	.030		
.XX	.010	.010		
.XXX	.005	.005	SCALE	NONE
DRAWN BY	Wu Siyuan		UNIT	MM
			SHEET	2/2
CHECK BY			DATE	25/09/26
			DWG No.:	AQ1617
CUSTOMER P/N:			P/N:1.AMSE70010007	