

电气特性:
 1.100%开路、短路、断路测试。
 2.绝缘阻抗: 10M Ωhm Min
 3.导通阻抗: 2 Ωhm MAX
 4.耐压: DC 300V,0.01/Sec


8654 8I 防尘帽 12



12	防尘帽	8654 8I 防尘帽	1	PCS
11	醋酸胶布	W=7±3mm, 黑色	A/R	mm
10	标签	W6*L24, PRINT "P1&P2&P3&P4&P5&P6&P7&P8"	8	PCS
9	连接器	SATA 7P/F, PIN:G/F	8	PCS
8	网管	PET 黑色 OD: 10mm	A/R	mm
7	醋酸胶布	W=25±5mm, 黑色	A/R	mm
6	胶料	45P PVC 黑色	A/R	g
5	胶料	LDPE, NATURAL	A/R	g
4	胶料	PBT+30%GF 黑色	A/R	g
3	弹片	不锈钢弹片	9	PCS
2	PCB	SLIMSAS 8I PCB, PIN:Au 15U" 88±8 ohm	1	PCS
1	线材	<32AWG*2C+2d>*AL+MYLAR, OD:0.67*1.54MM, 85±5 ohm.	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT


A	INITIAL RELEASE		25/08/27			
REV	DESCRIPTION OF CHANGE		DATE			
TOLERANCE			OIKWAN® 东莞市涛群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD.			
INCHES						
MM						
.X	.015	.30	SCALE	NONE	REV	A
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/2	CUSTOMER:	
DRAWN BY	TONY CHAN		DATE	25/08/27	DWG NO:	
CHECK BY			TITLE: SLIMSAS 8654 8I TO 8*SATA			
CUSTOMER P/N:			P/N: 1.AMSAS0010001			

PIN ASSIGNMENT:

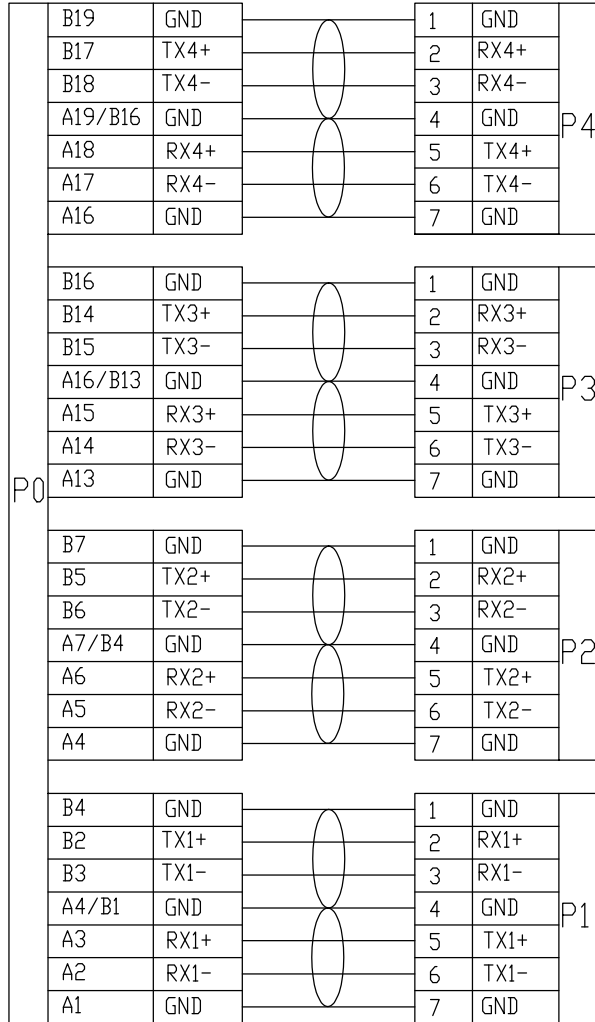

NC:A8,A9,A10,A11,A12,
B8,B9,B10,B11,B12

Positive

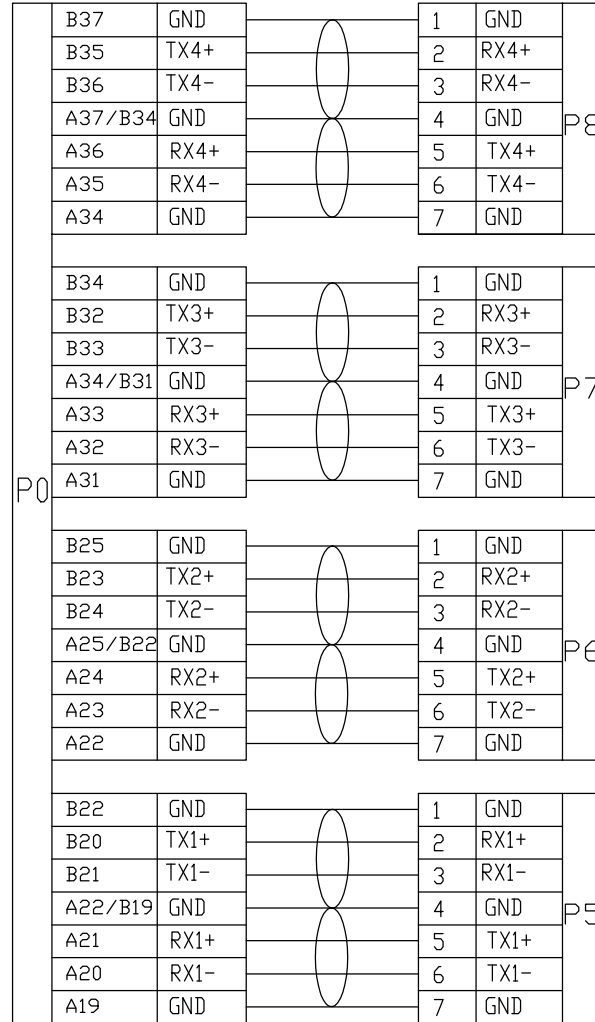

NC:A26,A27,A28,A29,A30,A31
B26,B27,B28,B29,B30,B31

A	INITIAL RELEASE		25/08/27	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			OIKWAN ® 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.	
INCHES				
MM				
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	2/2
			DATE	25/08/27
			COSTOMER:	
			DWG NO.:	
			TITLE: SLIMSAS 8654 8I TO 8*SATA	
DRAWN BY			TONY CHAN	
CHECK BY				
CUSTOMER P/N:			P/N: 1.AMSAS0010001	