

受控文件②
2025-09-02
DIKWAN


电气特性:
1.100%开路、短路、断路测试。
2.绝缘阻抗: 10M Ohm Min
3.导通阻抗: 2 Ohm MAX
4.耐压: DC 300V,0.01/Sec

15	防尘帽	8654 4I 防尘帽	2	PCS
14	防尘帽	MCID 8X 防尘帽	1	PCS
13	拉环	拉环	1	PCS
12	标签	P1/P2 标签	2	PCS
11	醋酸胶布	W=7±3mm,黑色	A/R	mm
10	外壳	MCID 8X PA66+20%GF 黑色外壳	1	PCS
9	弹片	不锈钢弹片	3	pcs
8	网管	PET 黑色 OD: 10mm	A/R	mm
7	醋酸胶布	W=25±5mm,黑色	A/R	mm
6	胶料	低压料PA	A/R	g
5	胶料	LDPE,半透明	A/R	g
4	胶料	PBT+30GF% 黑色	A/R	g
3	PCBA	MCID 8X PCB,PIN:Au 15U" 88±8 ohm	1	PCS
2	PCBA	SLIMSAS 4I PCB,PIN:Au 15U" 88±8 ohm	2	PCS
1	线材	<30AWG*2C+2D>AL+MYLAR,OD:0.8*1.76MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT

A	INITIAL RELEASE		25/09/27
REV	DESCRIPTION OF CHANGE		DATE
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.
INCHES			
MM			
.X	.015	.30	SCALE NONE
.XX	.010	.10	UNIT MM
.XXX	.005	.05	SHEET 1/2
DRAWN BY	Wu Siyuan		CUSTOMER:
CHECK BY			DATE 25/09/27
CUSTOMER P/N:			DWG NO:
P/N:1.AMSE90010001			TITLE: MCID 8X TO 2*8654 4I


P0

P1

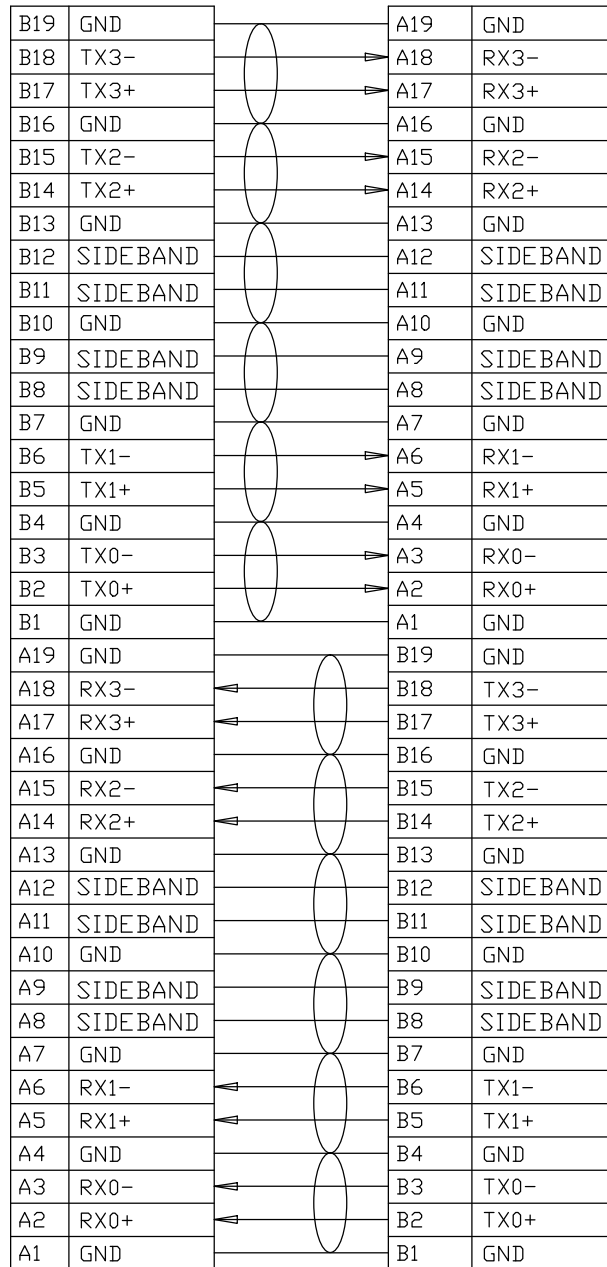

P0

P2

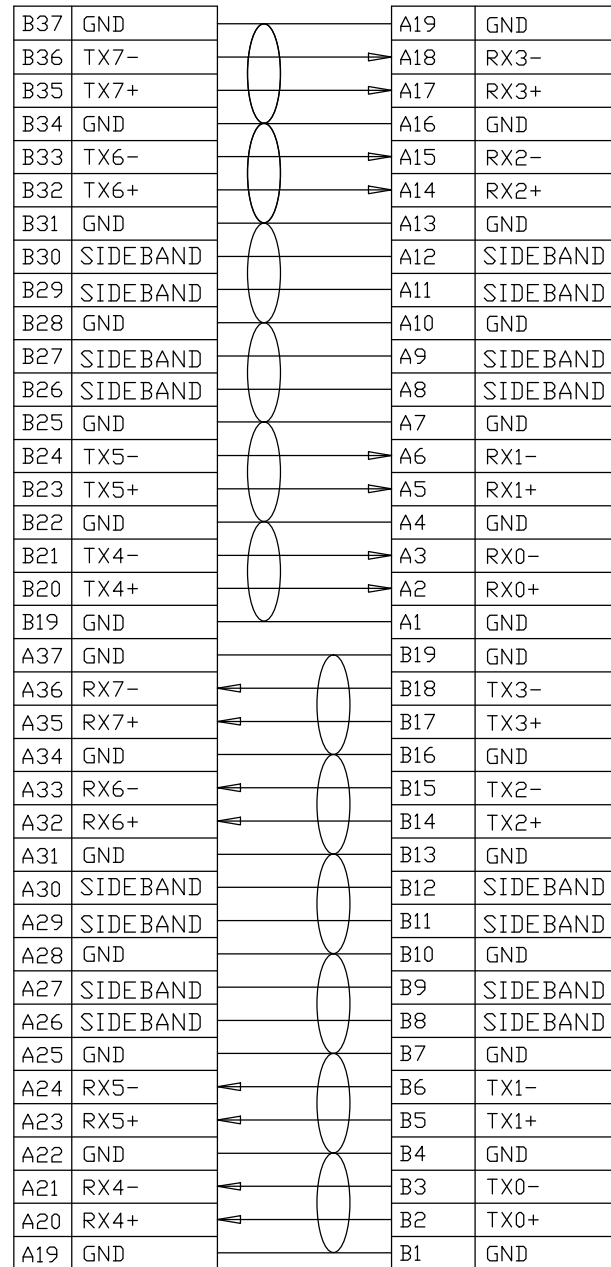

A	INITIAL RELEASE		25/09/27			
REV	DESCRIPTION OF CHANGE		DATE			
TOLERANCE			 东莞市 莞群 实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.			
INCHES					SCALE	NONE
MM					UNIT	MM
					REV	A
.X	.015	.30	SHEET	2/2		
.XX	.010	.10	DATE	25/09/27		
.XXX	.005	.05	CUSTOMER:			
DRAWN BY			DATE	25/09/27		
CHECK BY			DWG NO:			
CUSTOMER P/N:			TITLE: MCID 8X TD 2*8654 4I			
			P/N:1.AMSE90010001			