



电气特性:



- 1.100%开路、短路、断路测试。
- 2.绝缘阻抗: 10M Ωhm Min
- 3.导通阻抗: 2 Ωhm MAX
- 4.耐压: DC 300V,0.01/Sec



12	防尘帽	LP 8I 防尘帽	1	pcs
11	防尘帽	SLIMSAS 8I 防尘帽	1	pcs
10	拉环	浅蓝色拉环	1	pcs
9	弹片	不锈钢弹片	2	pcs
8	网管	PET BALCK OD: 10mm	A/R	mm
7	醋酸胶布	W=25±5mm, 黑色	A/R	mm
6	醋酸胶布	W=7±3mm, 黑色	A/R	mm
5	胶料	PE	A/R	g
4	胶料	PBT+30%GF 黑色	A/R	g
3	PCBA	SLIMSAS LP 8I PCB, PIN: Au 15U" 88±8 ohm	1	pcs
2	PCBA	SLIMSAS 8i PCB, PIN: Au 15U" 88±8 ohm	1	PCS
1	线材	32AWGx2C+2D+AL.Mylay+Amylay印字, 85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT

A	INITIAL RELEASE		25/09/11		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE					
INCHES			MM		
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY	WSY	SCALE	NONE	REV	A
		UNIT	MM		
CHECK BY		SHEET	1/2	CUSTOMER:	
		DATE	25/09/11	DWG NO:	
CUSTOMER P/N:		TITLE: SLIMSAS LP 8I TO 8654 8I			
		P/N: 1.AMSDA0010001			

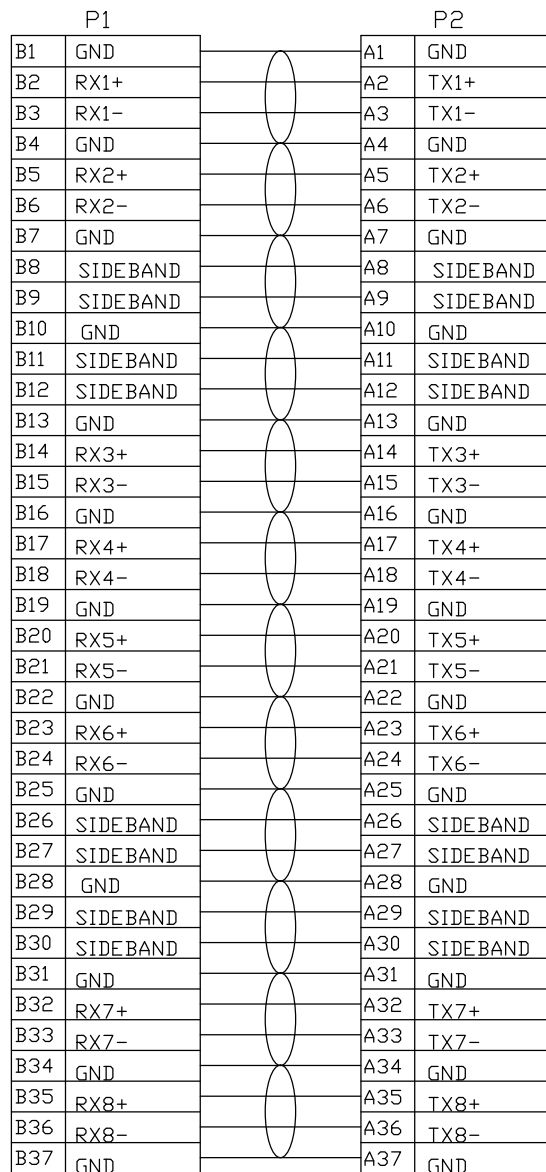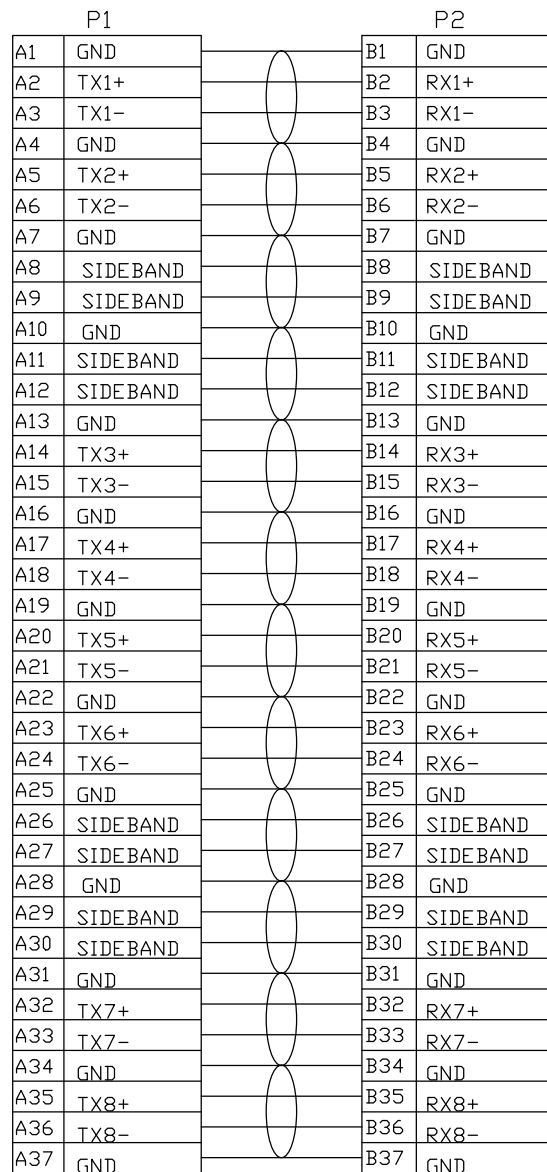

A	INITIAL RELEASE		25/09/11				
REV	DESCRIPTION OF CHANGE		DATE				
TOLERANCE			 <b>DIKWAN</b> 东莞市葛群实业有限公司 DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.				
INCHES							
MM							
.X	.015	.30					
.XX	.010	.10	SCALE	NONE		REV	A
.XXX	.005	.05	UNIT	MM			
DRAWN BY	WSY		SHEET	2/2	CUSTOMER:		
			DATE	25/09/11	DWG NO:		
CHECK BY			TITLE: SLIMSAS LP 8I TO 8654 8I				
			CUSTOMER P/N:		P/N: 1.AMSDA0010001		