


- 电气特性:
- 1.100%开路、短路、断路测试。
  - 2.绝缘阻抗: 10M Ohm Min
  - 3.导通阻抗: 2 Ohm MAX
  - 4.耐压: DC 300V,0.01/Sec

12	防尘帽	8087防尘帽	1	PCS
11	标签	贴纸 "P1&P2&P3&P4"	4	PCS
10	编织网	黑色编织网 OD: 10mm, PET	A/R	mm
9	醋酸胶布	黑色醋酸胶布, W=25±5	A/R	mm
8	弹片	不锈钢弹片	1	PCS
7	插头	SATA 15P 母头, 端子镀金G/F, 黑色胶芯	4	PCS
6	插头	SAS 29P母头, 端子镀金G/F, 黑色胶芯	4	PCS
5	胶料	45P PVC 黑色 ROHS	A/R	G
4	胶料	本色低密度PE料	A/R	G
3	胶料	PBT 黑色 ROHS	A/R	G
2	PCB	SAS 8087 PCB,PIN: Au 15U" 100±10 ohm	1	PCS
1	线材	(30AWG*2C+2D)*AL+MYLAR,OD:0.97*2.17MM,镀锡铝箔线	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT

A	INITIAL RELEASE		25/10/21
REV	DESCRIPTION OF CHANGE		DATE
TOLERANCE			<b>DIKWAN® 东莞市谦群实业有限公司</b> DONGGUAN AIQUN INDUSTRIAL CO.,LTD
	INCHES	MM	
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	WSY		SCALE NONE
CHECK BY			UNIT MM
APPD BY			SHEET 1/2
CUSTOMER P/N:			DATE 25/10/21
		TITLE: MINISAS 8087-4*8482+15P一体式	
		DWG NO:	
		P/N: 1.AMS150Y10001	

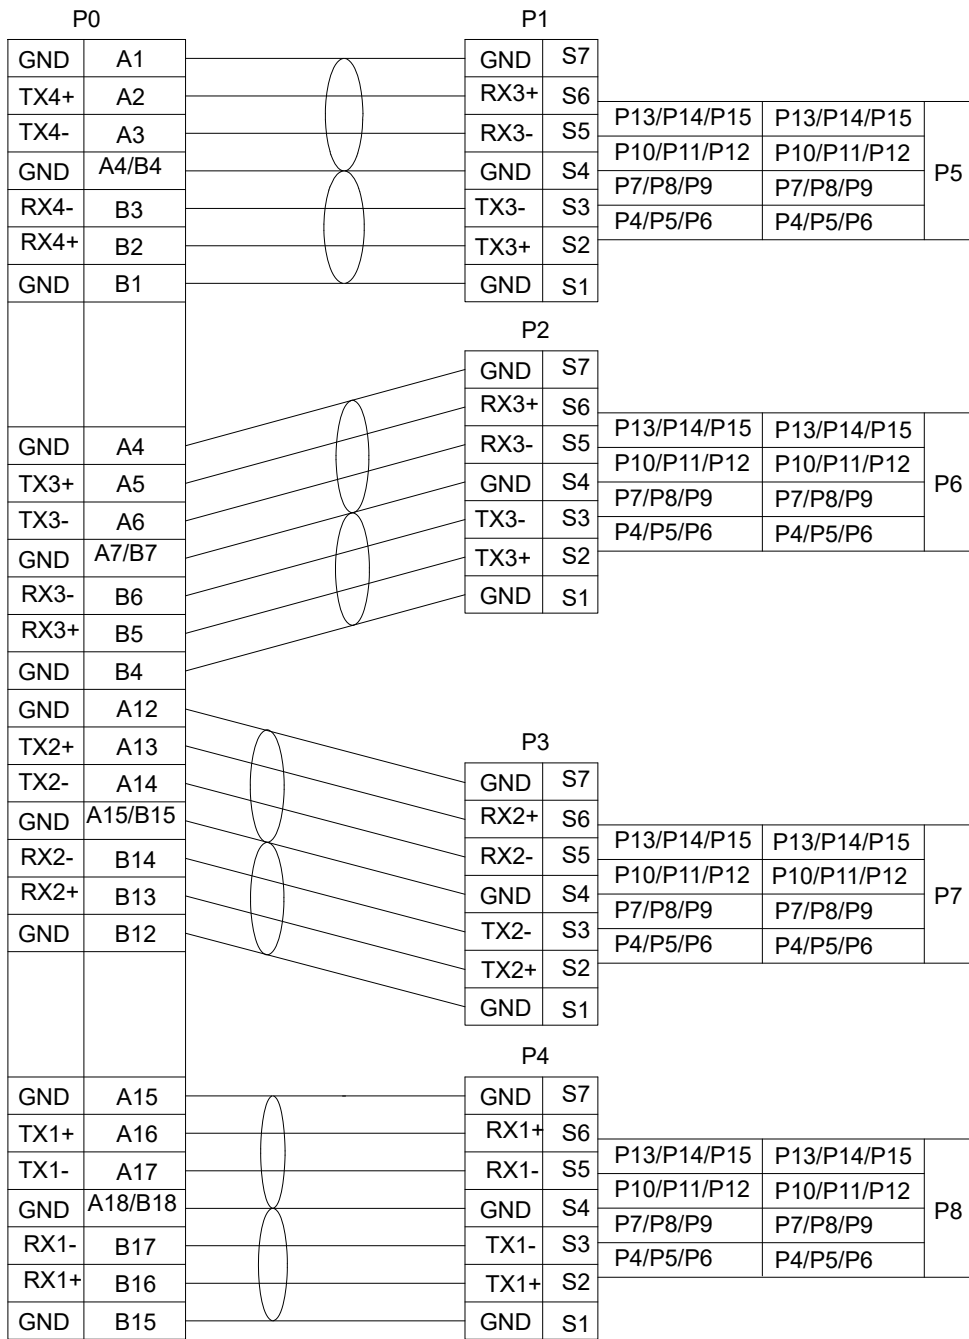

A	INITIAL RELEASE		25/10/21		
REV	DESCRIPTION OF CHANGE			DATE	
TOLERANCE					
INCHES    MM					
.X	.015	.30	<b>DIKWAN® 东莞市蔼群实业有限公司</b> DONGGUAN AIQUN INDUSTRIAL CO.,LTD		
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY	WSY	UNIT	MM	REV	A0
CHECK BY		SHEET	2/2	CUSTOMER:	
APPD BY		DATE	25/10/21	DWG NO:	
CUSTOMER P/N:	TITLE: MINISAS 8087-4*8482+15P一体式				
	P/N: 1.AMS150Y10001				