


8644防尘帽 ⑤


受控文件②
2025-09-19
OIKWAN

电气特性:
1.100%开路、短路、断路测试。
2.绝缘阻抗: 10M Ωhm Min
3.导通阻抗: 2 Ωhm MAX
4.耐压: DC 300V,0.01/Sec

NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT
5	防尘帽	8644防尘帽	2	PCS
4	胶料	PA,黑色	A/R	KG
3	装配零件	MINISAS HD 组件 (锌合金罩、钩、拉片、橡胶环)	2	PCS
2	PCBA	MINISAS HD 4X PCBA, PIN: Au 15U*, 100±10 Ωhm	4	PCS
1	线材	(30AWG*2C+D+HMAM+HM)*8C+M+AM+B, DD: 6.8 MM, 黑色 PVC JACKET 100±5 Ωhm	A/R	mm

A	INITIAL RELEASE		25/09/09
REV	DESCRIPTION OF CHANGE		DATE
TOLERANCE			OIKWAN 东莞市莞群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO., LTD
INCHES		M/M	
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	TONY CHAN		SCALE NONE
CHECK BY			UNIT MM
			SHEET 1/2
DATE 25/09/09		DWG NO.: AQ16-165	REV A
TITLE: MINISAS HD 8644-8644			
CUSTOMER. P/N:		P/N: 1.AMS440010001	

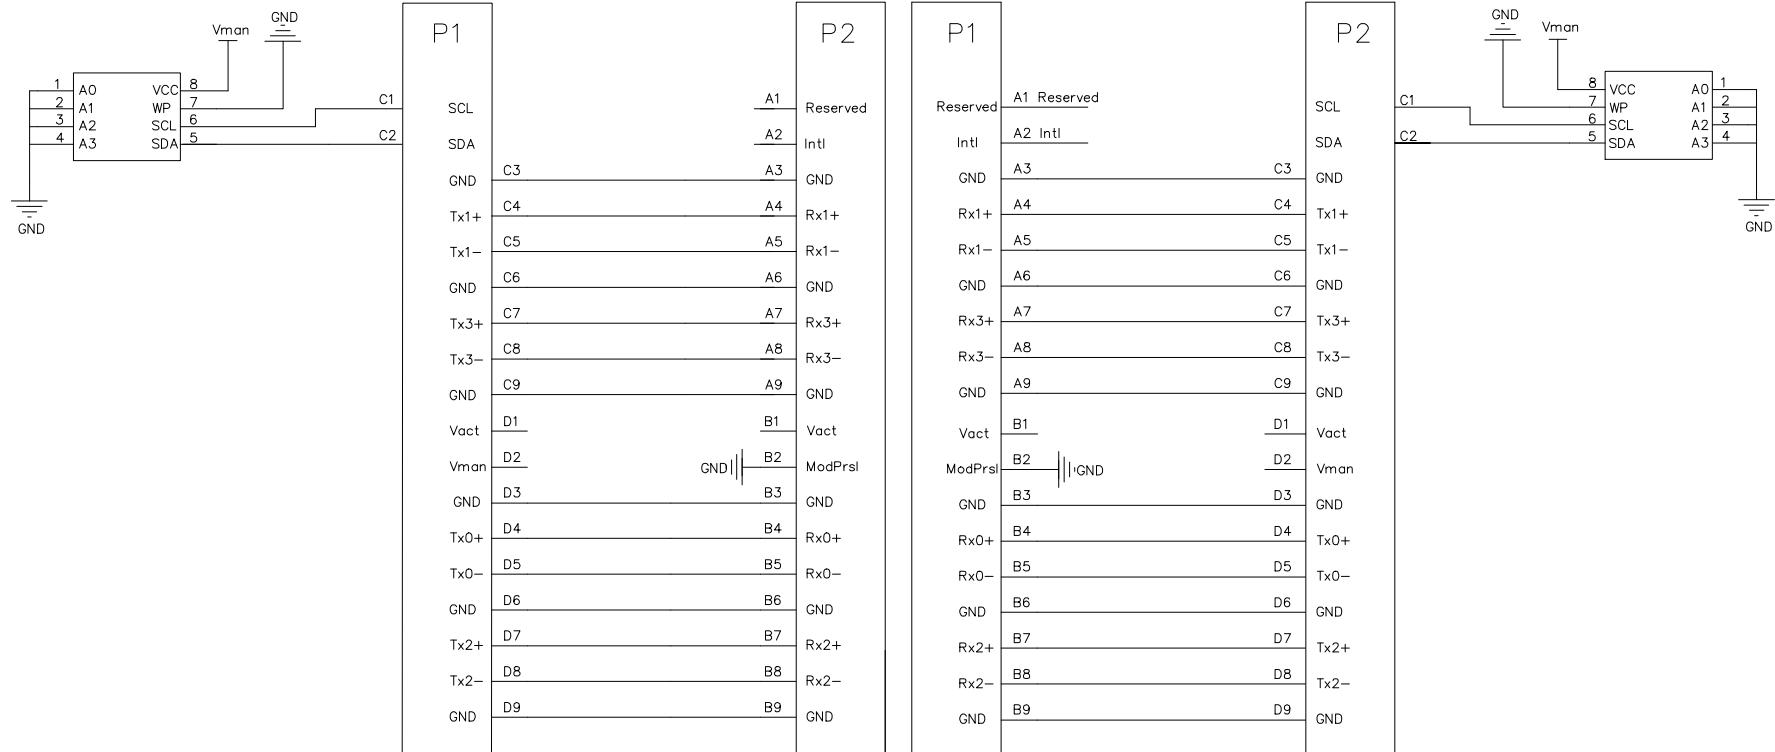

A	INITIAL RELEASE		25/09/09	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES			M/M	
.X	.015	.30	OIKWAN 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	TONY CHAN	SCALE	NONE	 REV A
		UNIT	MM	
CHECK BY		SHEET	2/2	COSTOMER:
		DATE	25/09/09	
CUSTOMER. P/N:		TITLE: MINISAS HD 8644-8644		
		P/N:1.AMS440010001		