
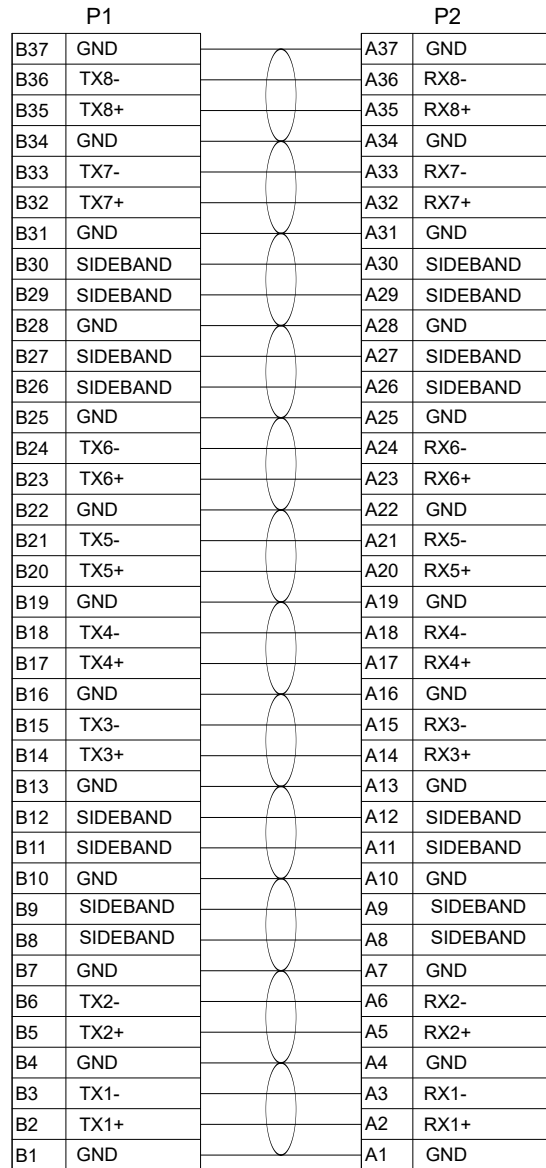


14	防尘帽	LP 防尘帽	1	PCS
13	防尘帽	MCIO 8X 防尘帽	1	PCS
12	拉环	拉环	2	PCS
11	醋酸胶布	W=7±3mm, 黑色	A/R	mm
10	胶料	LDPE,NATURAL	A/R	G
9	胶料	PBT+30%GF 黑色	A/R	G
8	PCB	SLIMSAS LP 8I PCB,PIN: Au 15U" ,88±8 ohm	1	PCS
7	弹片	不锈钢弹片	2	PCS
6	网管	PET 黑色 OD: 10mm	A/R	mm
5	醋酸胶布	W=25±5mm,黑色	A/R	mm
4	胶料	PA,黑色	A/R	G
3	外壳	MCIO 8X, PA66+30%GF, 黑色外壳	1	PCS
2	PCB	MCIO 8X PCB, PIN: Au 15U" 88±8 ohm	1	PCS
1	线材	PCIE 4.0 (30AWG*1P PP+34AWG*2C) OD0.8*1.76 85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

电气特性:
 1.100%开路、短路、断路测试。
 2.绝缘阻抗: 10M Ohm Min
 3.导通阻抗: 2 Ohm MAX
 4.耐压: DC 300V,0.01/Sec

A	INITIAL RELEASE		25/10/28		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE			DIKWAN ® 东莞市嵩群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD		
INCHES MM					
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05	SCALE	NONE	
DRAWN BY	Wu SiYuan	UNIT	MM	REV	A
		SHEET	1/2	CUSTOMER:	
CHECK BY		DATE	25/10/28	DWG NO:	
		TITLE: MCIO 8X-LP 8I			
CUSTOMER P/N:		P/N: 1.AMSDE0010003			

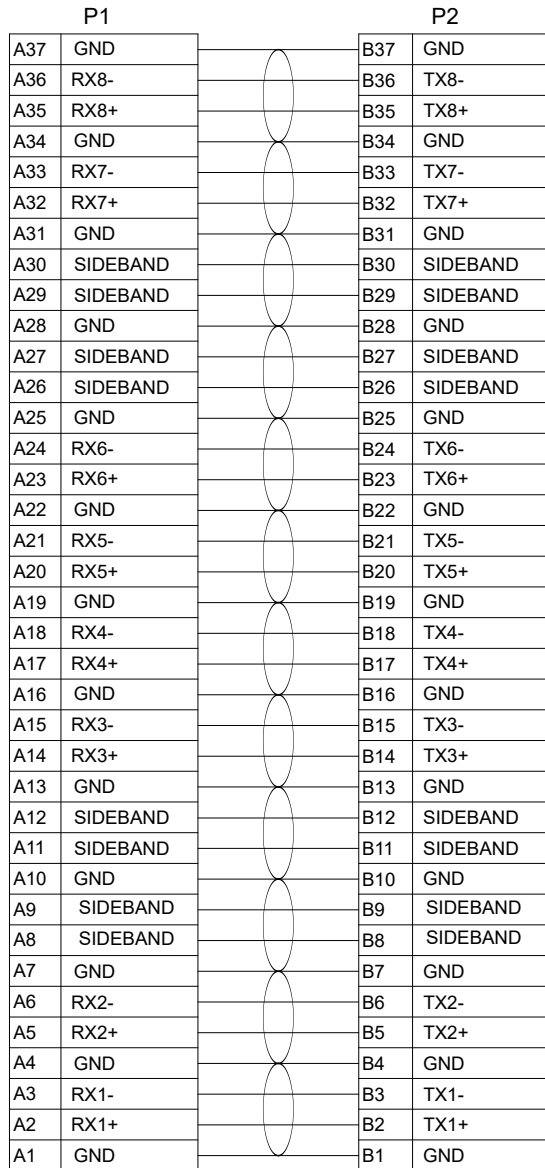

A	INITIAL RELEASE			25/10/28	
REV	DESCRIPTION OF CHANGE			DATE	
TOLERANCE			DIKWAN® 东莞市嵩群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO., LTD		
INCHES			MM		
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05		SCALE	NONE
DRAWN BY	Wu SiYuan	UNIT	MM	REV	A
		SHEET	2/2		
CHECK BY		DATE	25/10/28	DWG NO:	
		TITLE: MCIO 8X-LP 8I			
CUSTOMER P/N:			P/N: 1.AMSDE0010003		